


| Model  | Enclosure Design   | Frequency Response | Efficiency    | Power / imp.        |
|--|--|--------------------|---------------|---------------------|
| RX-218   | Bass reflex  | 41,5~ 125Hz -3dB   | 101dB 1W / 1M | 1200W RMS / 4ohm    |
| Components   | Kast: Berken multiplex 18mm  |                    |               | Netto inhoud 280Ltr |
|  | Subwoofer: 18Sound 18W1300 600W/99,5dB 38-3300Hz                           |                    |               |                     |
|  | Highpass 30Hz lowpass 120Hz 4de order EQ 45Hz/Q=3/G=+4dB 75Hz/Q=2/G=-0,5dB |                    |               |                     |
| Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 17-11-2003 |  |                    |               |                     |

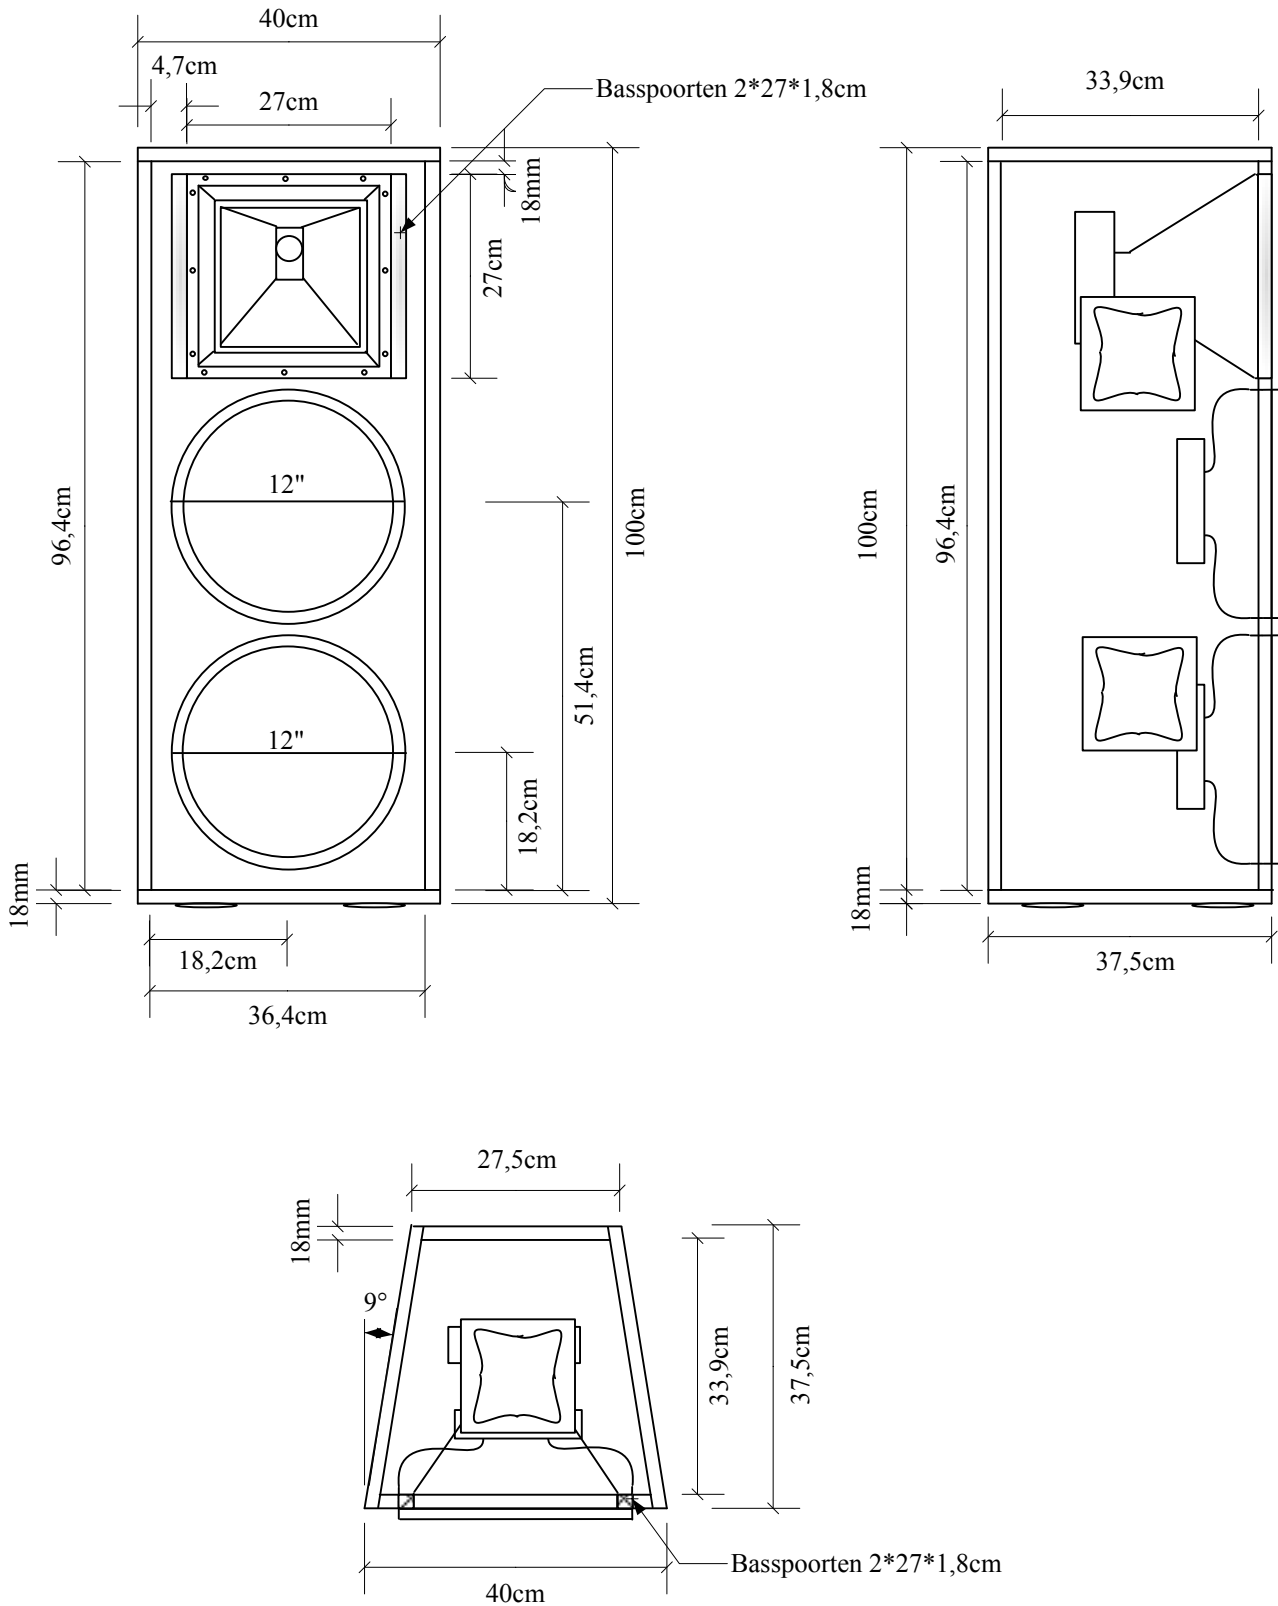

| Model  | Enclosure Design                                   | Frequency Response | Efficiency    | Power / imp.         |
|--|--|--------------------|---------------|----------------------|
| RX212-75   | Fullrange vented                                   | 90~ 20KHz -3dB     | 100,5dB 1W/1M | 700W AES / 4ohm      |
| Components   | Kast: Berken multiplex 18mm                        |                    |               | Netto inhoud 96,5Ltr |
|  | 2* bass/Mid: 18Sound 12MB700 60Hz-2000Hz/300W/8ohm |                    |               |                      |
| 1* Driver: 18Sound ND1460 80w/8ohm/1-20Khz - B&C ME90 80*60hoorn                           |  |                    |               |                      |
| Highpass 100Hz 4de order 100Hz/Q=32/G=+1,5dB passief filter 1,2KHz/12dB/okt 4/8ohm         |  |                    |               |                      |
| Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 17-11-2003 |  |                    |               |                      |