


Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
Sub15	Bass reflex	47~ 129Hz -3dB	97,5dB 1W / 1M	450W AES/ 8ohm
Components	Kast: Berken multiplex 18mm		Netto inhoud 120lts	
	Bass speaker: 18Sound 15W700 450W/96dB 35-1100Hz			
	highpass 30Hz , lowpass 150Hz 4de order EQ 50Hz/Q=3/G=+1dB 120Hz/Q=2/G=+1dB			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 09-08-2004				

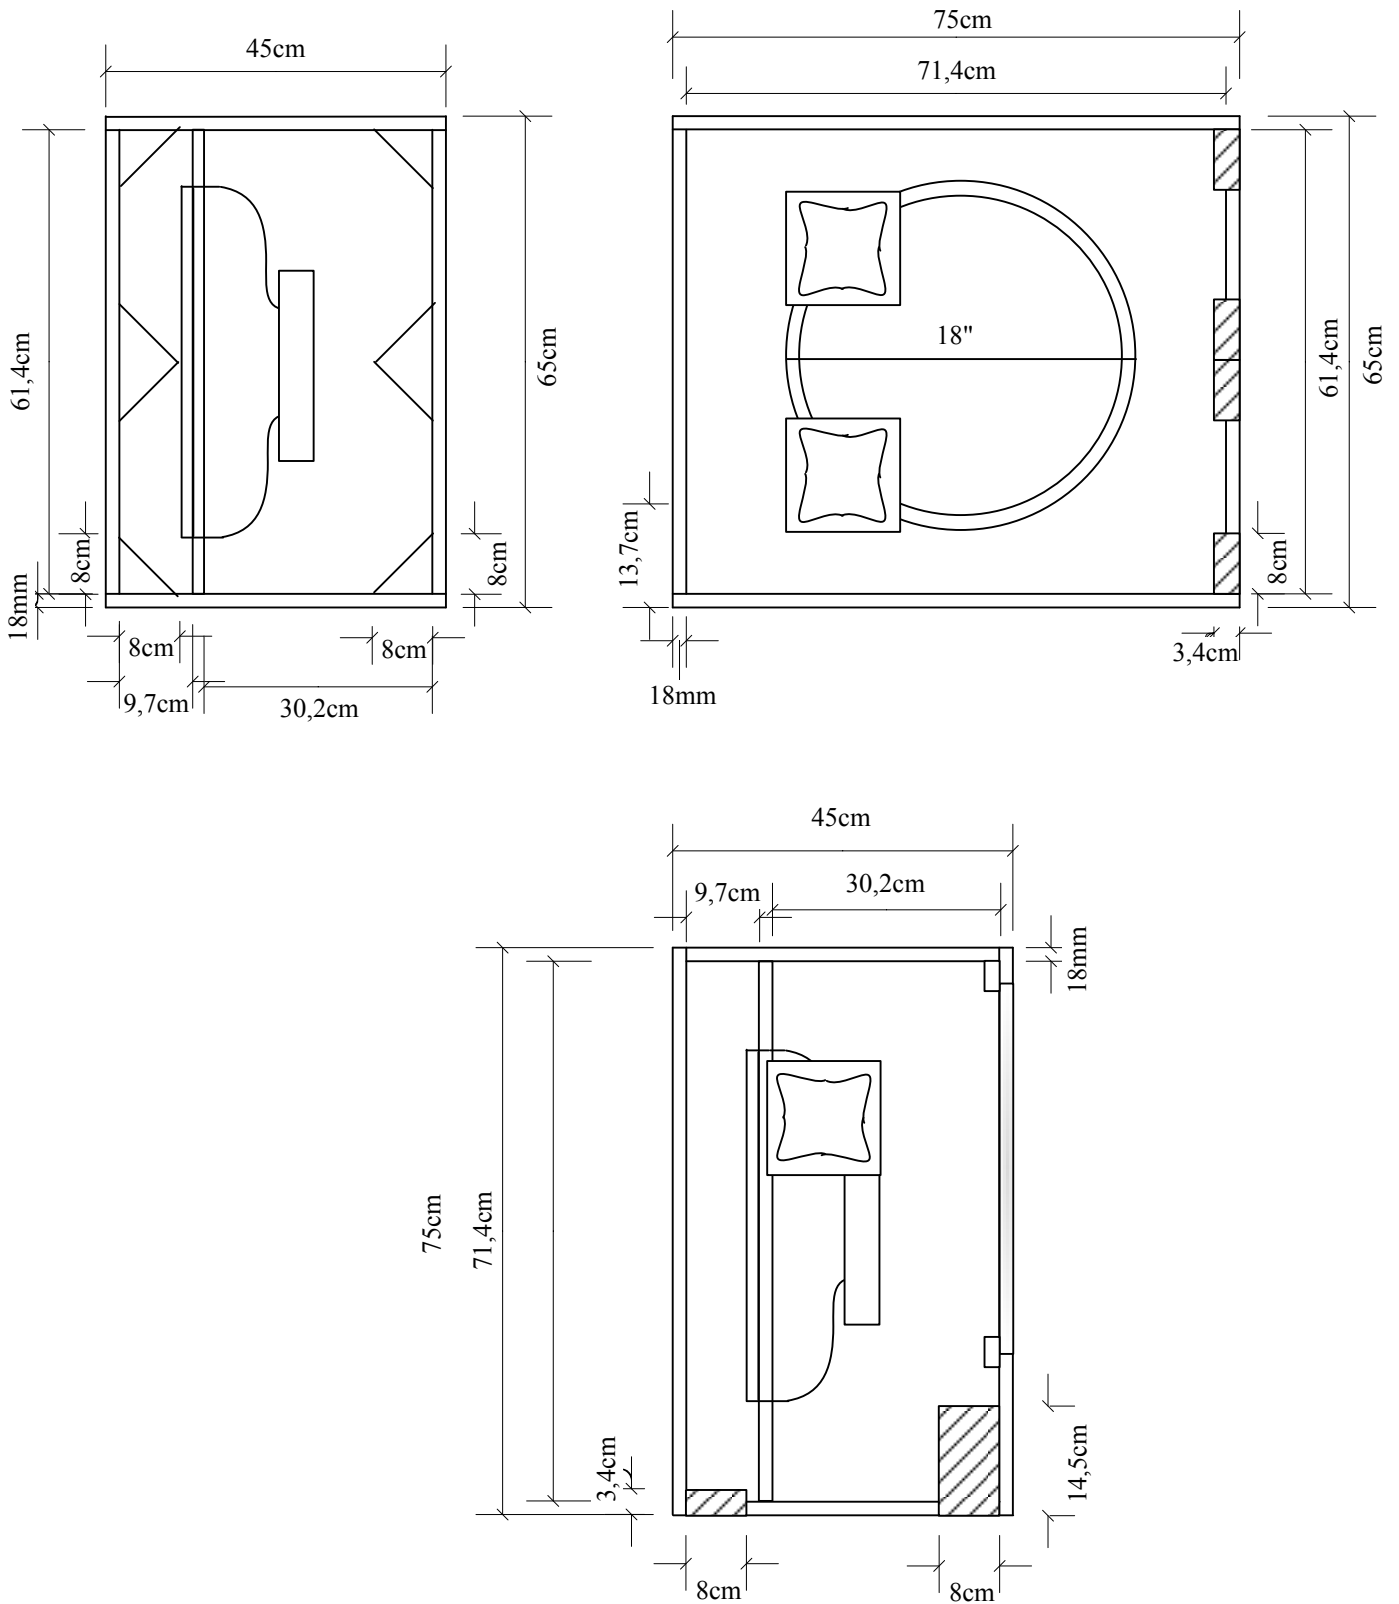

Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
Sub18	Band pass	45~147Hz -3dB	98dB 1W / 1M	500W AES/ 8ohm
Components	Kast: Berken multiplex 18mm		Netto inhoud r132Ltr/f42,5ltr	
	Bass: 18Sound LW800 500W/99,5dB 35-3300Hz			
	highpass 30Hz , lowpass 150Hz 4de order EQ 60Hz/Q=2/G=-0,5dB 90Hz/Q=1/G=+1dB			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 09-08-2004				