



Als fullrange top

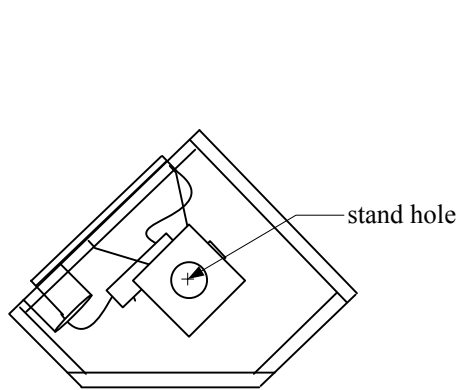

Als floormonitor

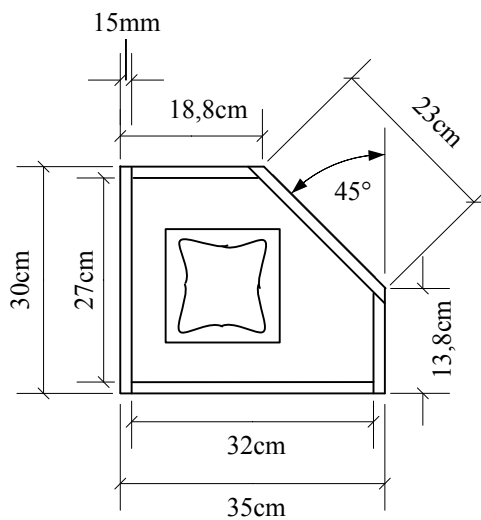

Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
TM2101	Fullrange vented	72~19KHz -3dB	99dB 1W/1M	500W RMS / 4ohm
Components	Kast: Fins berken multiplex 15mm			Netto inhoud: 55Lts
	Bass/Mid: 18Sound 10W400 60Hz-4000Hz/200W/8ohm			50Hz Lowcut/4de order
	Driver: P-audio SD450N driver 50w/8ohm/0,8-19Khz + ME20 90*60hoorn			
	passief filter 1500Hz 12dB/okt 4/8ohm			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 16-11-2003				