


Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
SW 215	Bass reflex	47~ 848Hz -3dB	101dB 1W / 1M	900W AES / 4ohm
Components	Kast: Berken multiplex 18mm			Netto inhoud 245Ltr
	Bass: 18Sound 15W700 450W/8ohm/38~5000Hz			
Highpass 30Hz Lowpass 800Hz 4de order 40Hz/Q=2/G=+1dB 100Hz/Q=1/G=+0,5dB 800Hz/Q=2/G=+2,5dB				
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 22-01-2010				

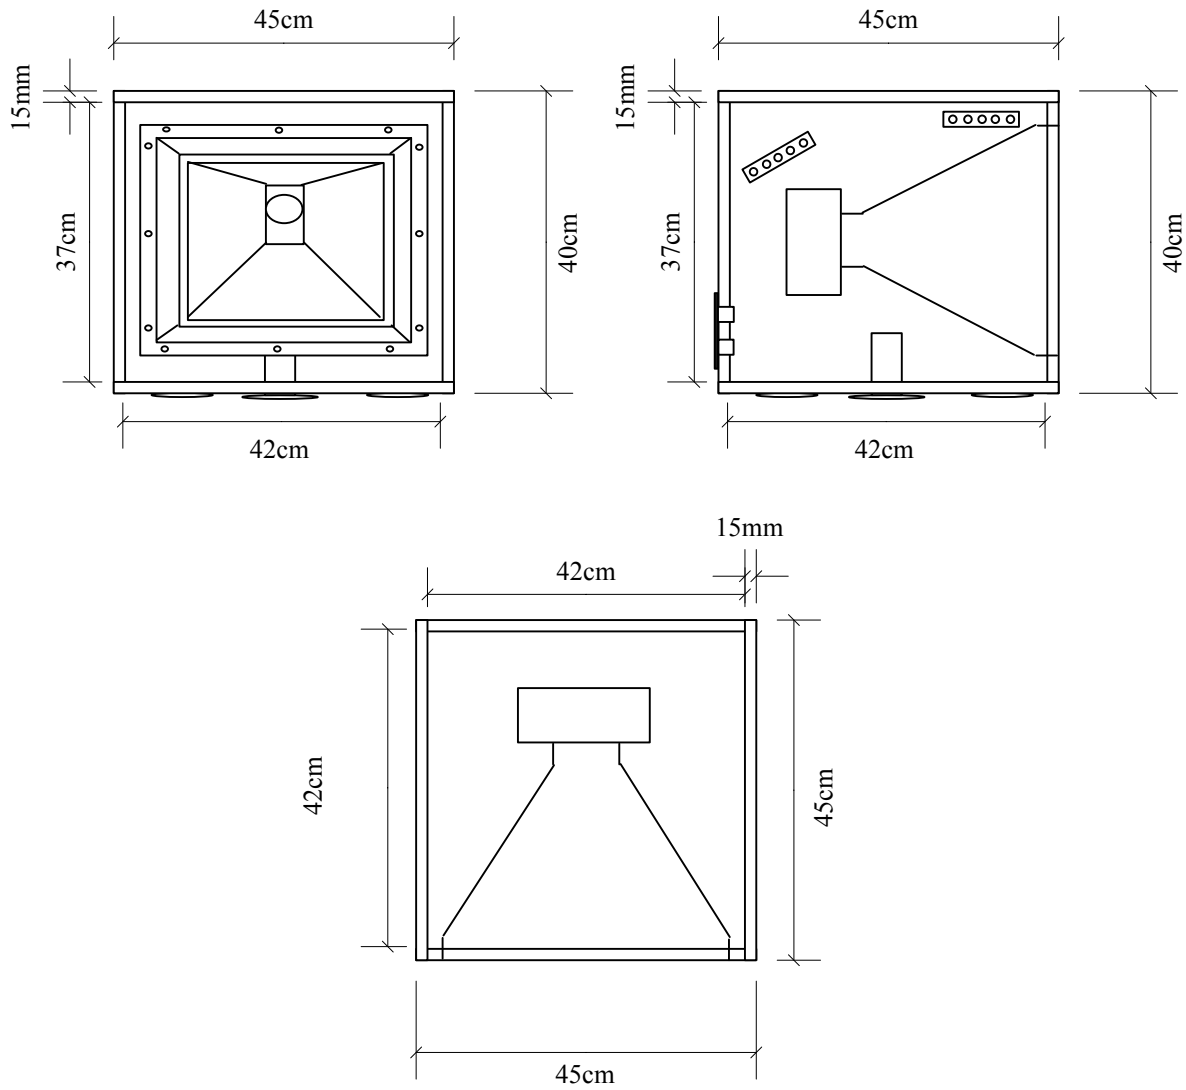

Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
SW 215 top	Flying top	0,8~20KHz -3dB	111dB 1W / 1M	100W AES / 4ohm
Components	Kast: Berken multiplex 18mm			Netto inhoud 245Ltr
	Driver: 18Sound NSD1480N 0,5~20KHz/11dB/100w/8ohm XT1464 Hoorn 60*50			
	Highpass 800Hz 4de order			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 22-01-2010				