


Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
RX-218	Bass reflex	40~ 121Hz -3dB	100,5dB 1W / 1M	1200W RMS / 4ohm
Components	Kast: Berken multiplex 18mm			Netto inhoud 280Ltr
	Subwoofer: EV EVX180B 600W/98dB 30-800Hz			
	Highpass 30Hz lowpass 120Hz 4de/8ste order 40Hz/Q=3/G=+3,5dB			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 17-11-2003				

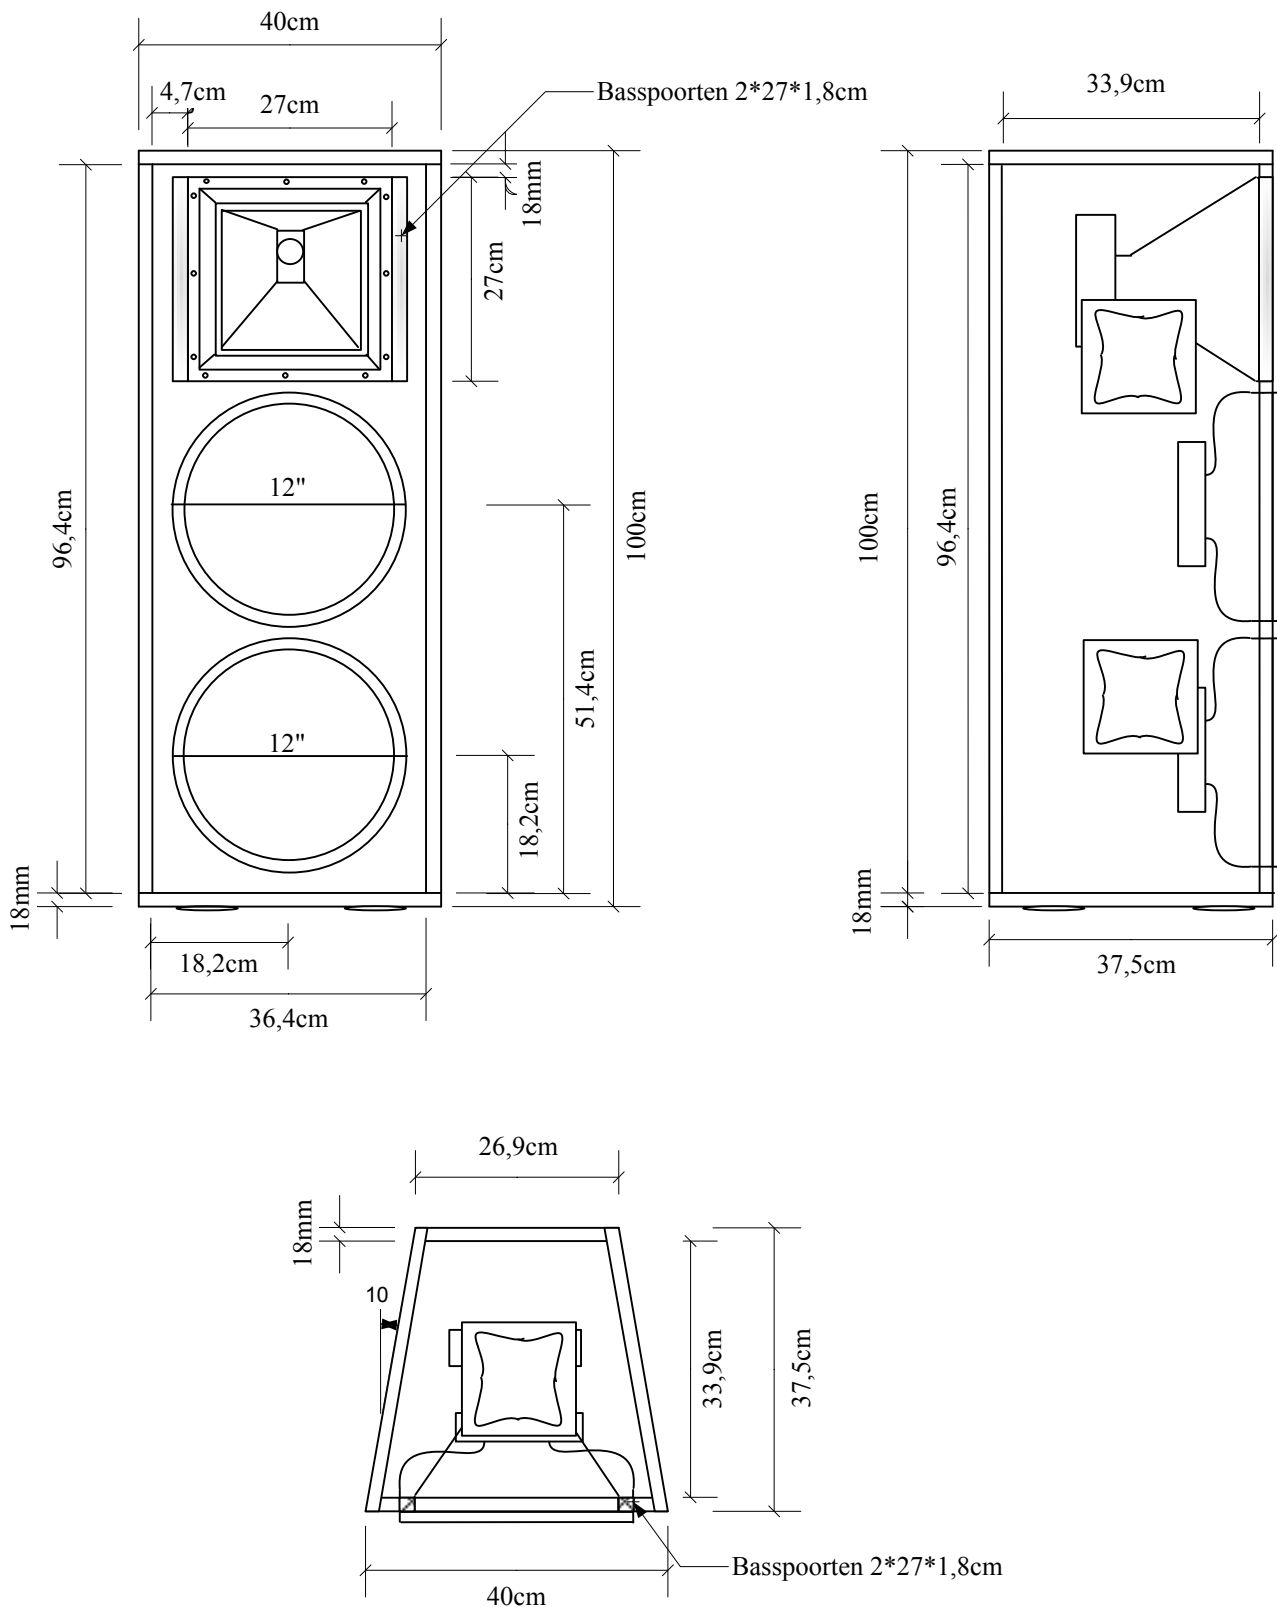

Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
RX212-75	Fullrange vented	118~ 20KHz -3dB	101dB 1W/1M	700W AES / 4ohm
Components	Kast: Berken multiplex 18mm			Netto inhoud 96Ltr
	Bass/Mid: EVX DL12BFH 60Hz-2500Hz/300W/8ohm		passief filter 1,6KHz/12dB/okt 4/8ohm	
	Driver: EV DH7-8 1,4" 75w/8ohm/1-20KHz - B&C ME90 80*60hoorn			
	Highpass 120Hz 8ste order 120Hz/Q=1/G=+1dB 450Hz/Q=1/G=-0,5dB 1400Hz/Q=1/G=+2dB			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 17-11-2003				