


Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
215 Sub 4Pro	Sub vented	45~ 93Hz -3dB	99,5dB 1W/1M	1600W AES/4ohm
Components	Kast: Fins multiplex 18mm			Inhoud kast: 150Ltr
	Bass: RCF LF15G401 35Hz-1500Hz/800W/8ohm			
	Highpass 40Hz Lowpass 90Hz 4de/8ste order 45Hz/Q=3/G=+3,5dB 90Hz/Q=3/G=+2dB			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 20-11-2005				

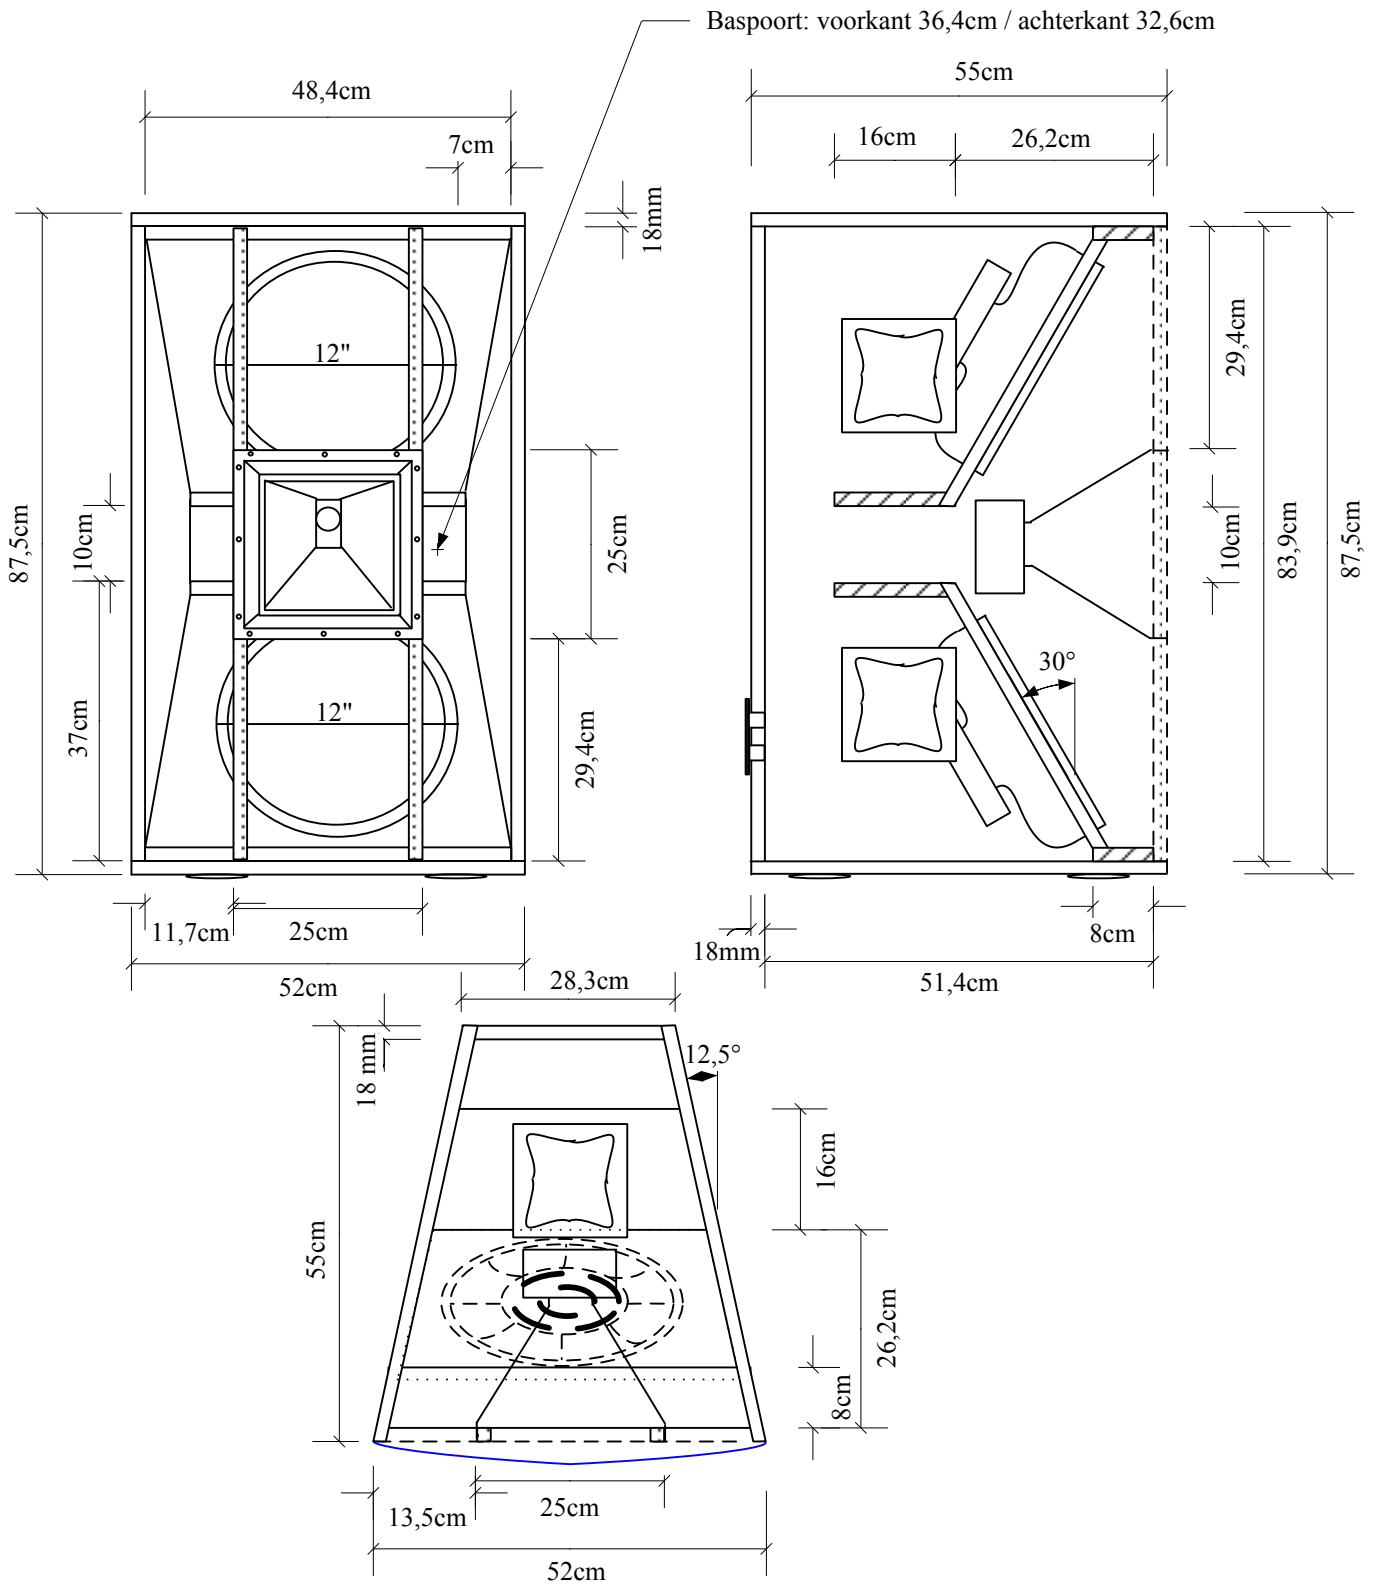

Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
212 Top 4Pro	Top vented	92~ 20KHz -3dB	100,5dB 1W/1M	800W AES/4ohm-MBass
Components	Kast: Fins multiplex 18mm			90W AES/8ohm-High
	Bass: RCF MB12G301 50Hz-3000Hz/400W/8ohm			Inhoud kast: 56Ltr
	Driver: RCF ND2530-T3 700Hz-20KHz/90W/8ohm / HF64 Hoorn 60*40			
	Highpass 90Hz Low/High-pass 1600Hz 8ste order 500Hz/Q=1/G=-0,5dB 1600Hz/Q=2/G=+1dB			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 20-11-2005				