


Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
AE11	Subwoofer vented	42 ~ 126Hz -3dB	97,8dB 1W/1M	1000W RMS / 4ohm
Components	Kast: Berken multiplex 18mm			Netto inhoud: 145Lts
	Bass: SL SP38A-500BS 32Hz-1500Hz 500W/8ohm			
Highpass 30Hz Lowpass 120Hz 4de order EQ 45Hz/Q=2/G=+4,5db 70Hz/Q=1/G=-1dB				
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 17-01-2004				

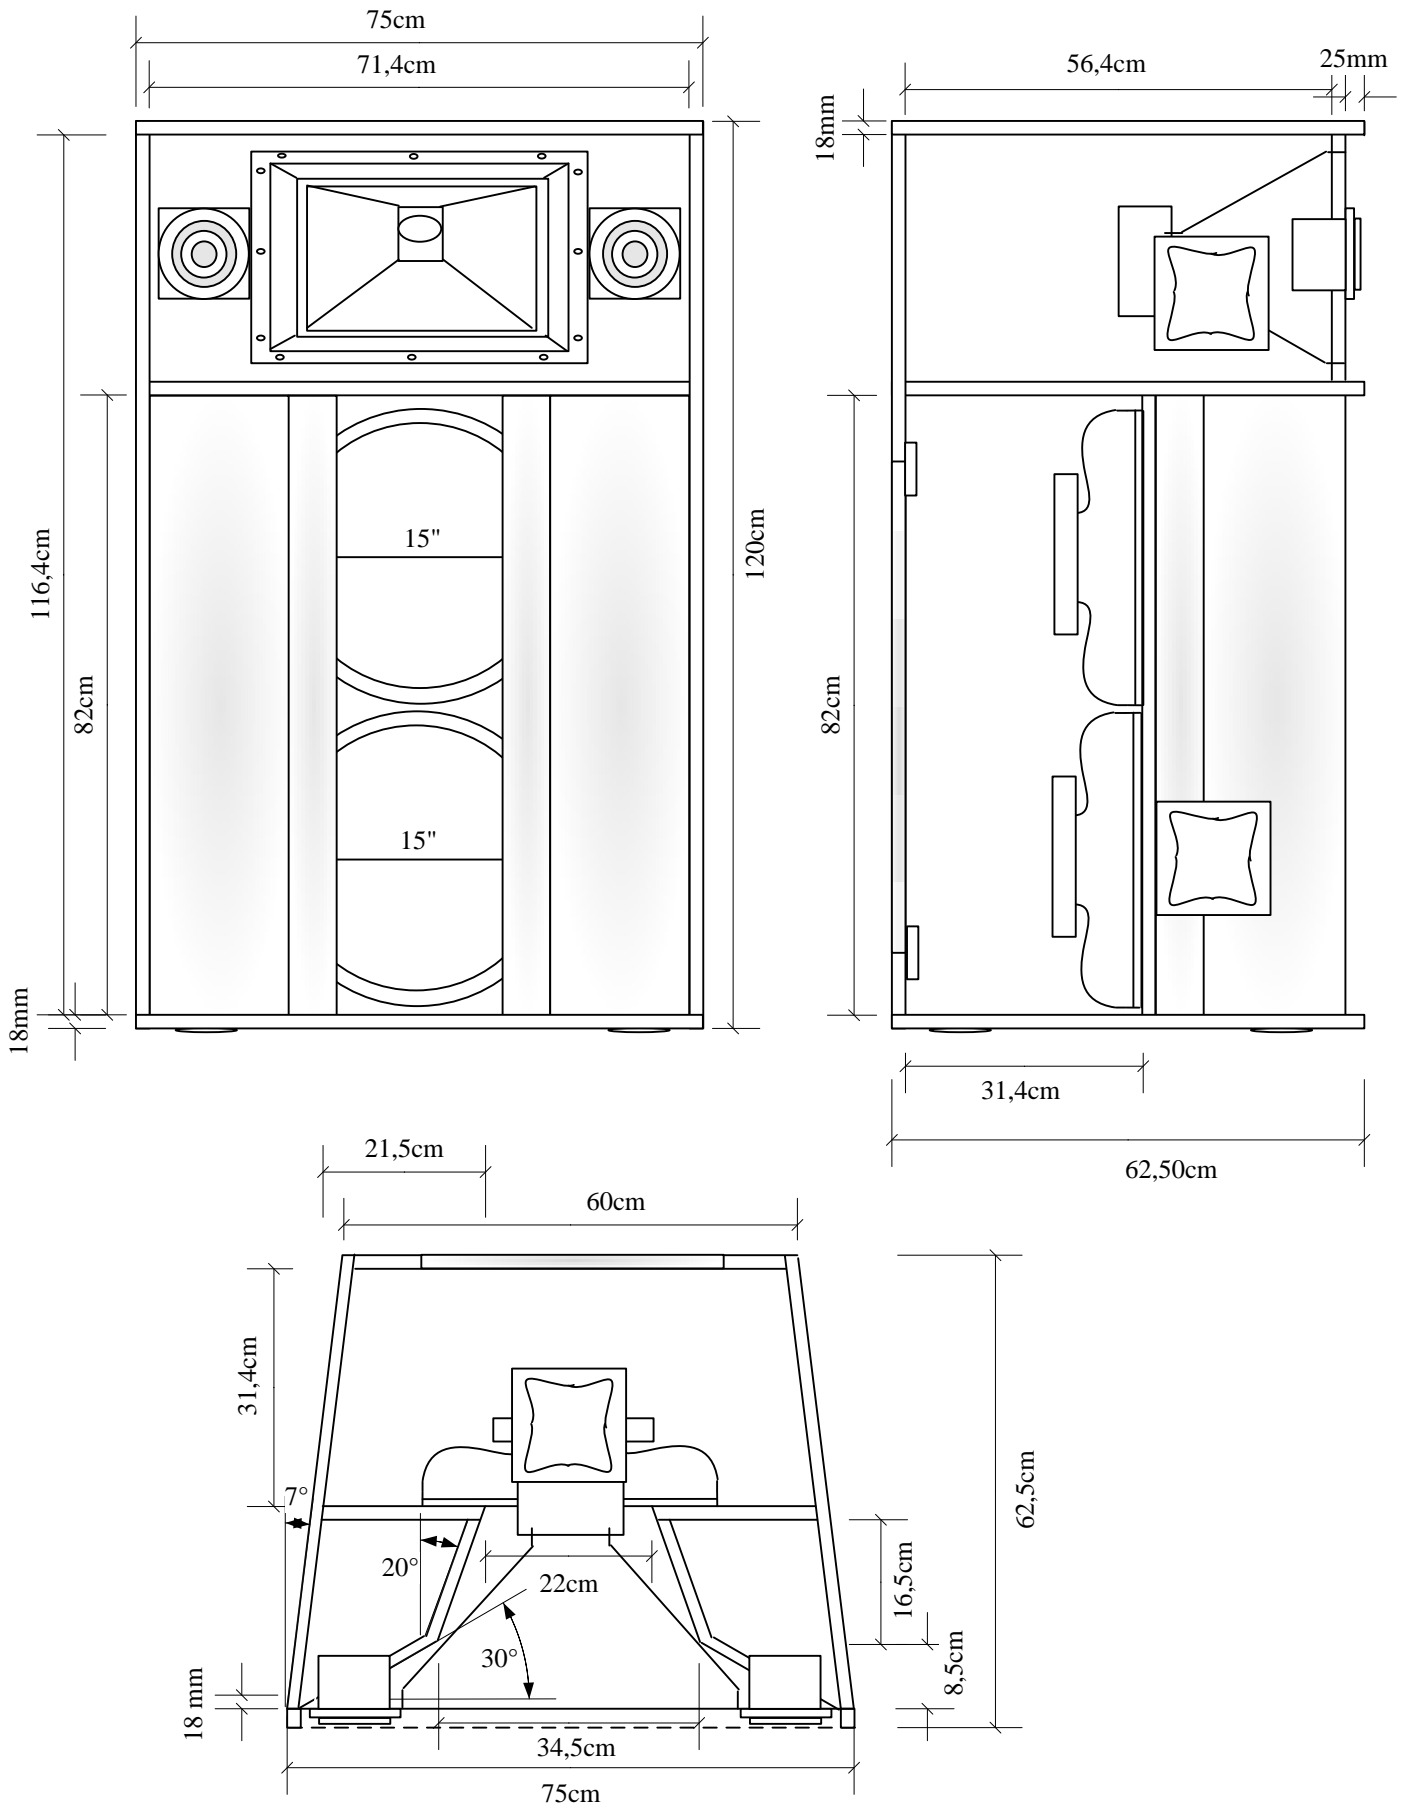

Model	Enclosure Design	Frequency Response	Power / imp.	Efficiency
3S2	Top vented	116~ 20kHz -3dB	3-weg actief /	105,5dB 1W/1M
Components	Bass: SL SP38-300PA 300W/8ohm/99dB		B 600W/4ohm - M 150w/8ohm - H 100W/4ohm	
	Mid driver: SL MRD-480N 125W/8ohm/111dB P-audio Hoorn PH-4528 60*40			
	Tweeter: SL MHD540 50W/8ohm/110dB 60*60			
Highpass 100Hz Bandpass 1,2 / 8KHz + Highpass 8KHz 4de order 120Hz/Q=2/G=+6db 500Hz/Q=1/G=-0,5dB				
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 17-01-2003				