


Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
BT15121	Fullrange vented	42~ 122Hz -3dB	98,3dB 1W/1M	1000W RMS/4ohm
Components	Kast: Fins multiplex 18mm			Netto inhoud: 196Ltr
	Bass: SL SP-38A-500BS 34Hz-2000Hz/500W/8ohm			
	Highpass 30Hz lowpass 120Hz 4de/8ste order 45Hz/Q=3/G=+2dB			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 09-08-2004				

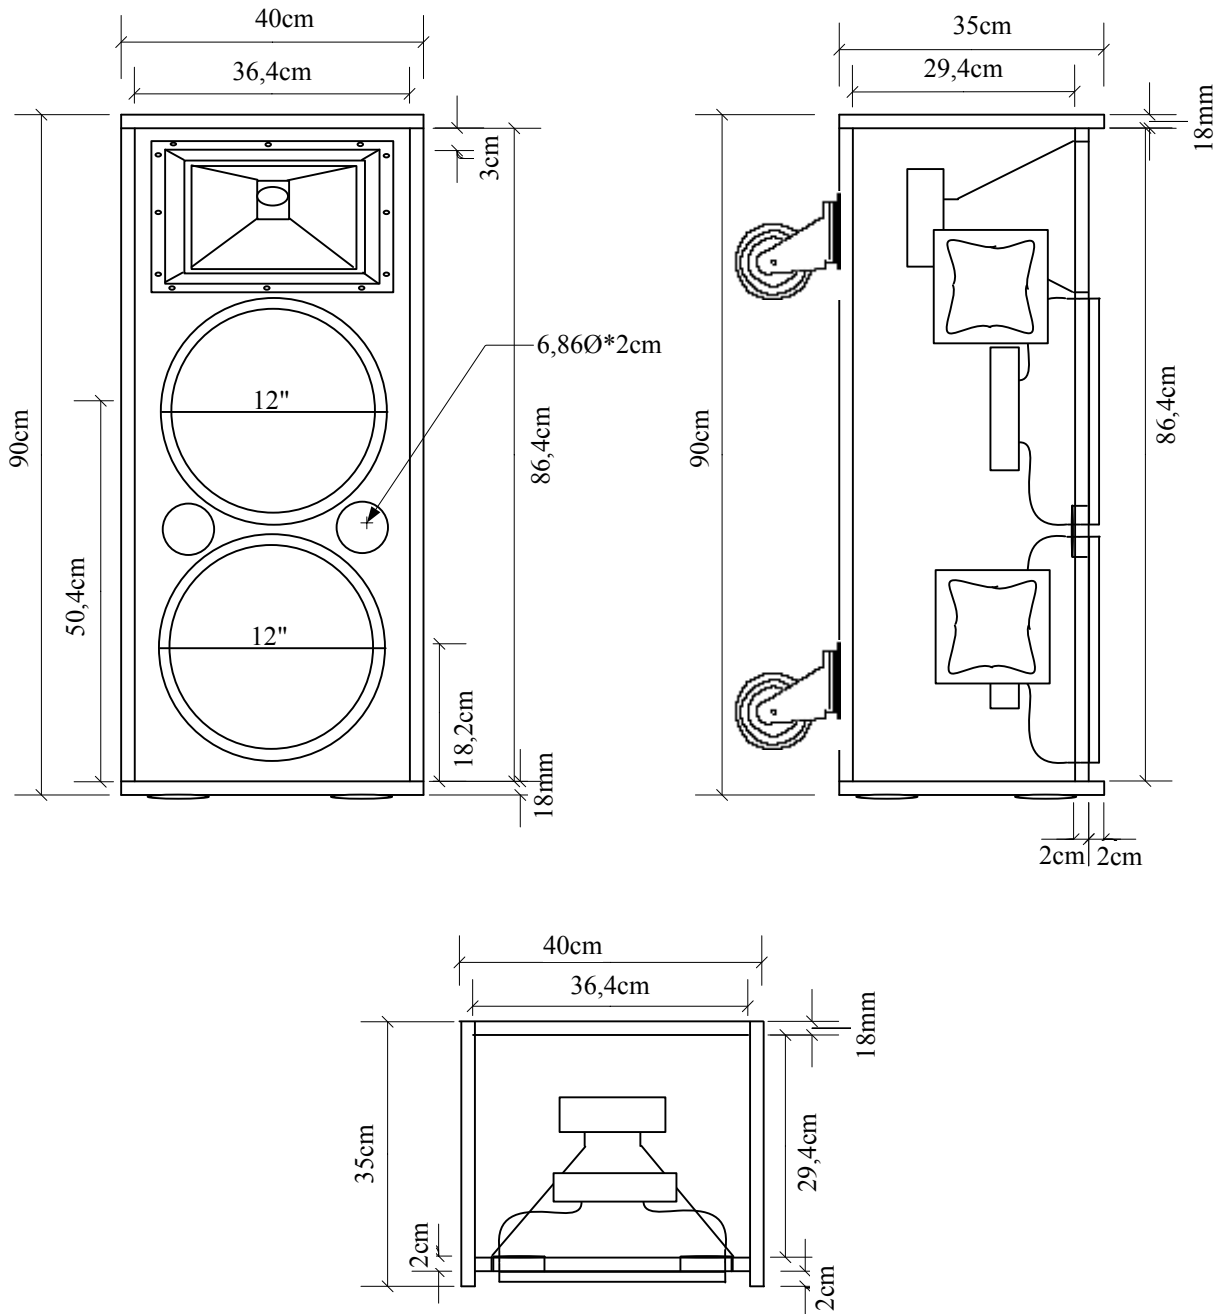

Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
BT15121	Fullrange vented	115~ 20KHz -3dB	99,5dB 1W/1M	700W RMS/4ohm
Components	Kast: Fins multiplex 18mm			Netto inhoud: 92,5Ltr
	Bass/Mid: SL SP12A-302PA 45Hz-5000Hz/300W/8ohm			
	Driver: SL MRD-180 60w/8ohm/2-20Khz + MRH200 100*60hoorn			
	Passief filter 1,8KHz/12dB/okt/ 4/8ohm			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 20-01-2005				