


Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
BT15-101	Fullrange vented	47~188Hz -3dB	99,5dB 1W/1M	600W RMS/8ohm
Components	Kast: Fins multiplex 18mm			Netto inhoud: 135Ltr
	Eminence Kappalite3015LF 34Hz-3000Hz/600W/8ohm			
	Highpass 30Hz Lowpass 180Hz 4de order EQ 50Hz/Q=3/G=+3dB			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 07-10-2004				

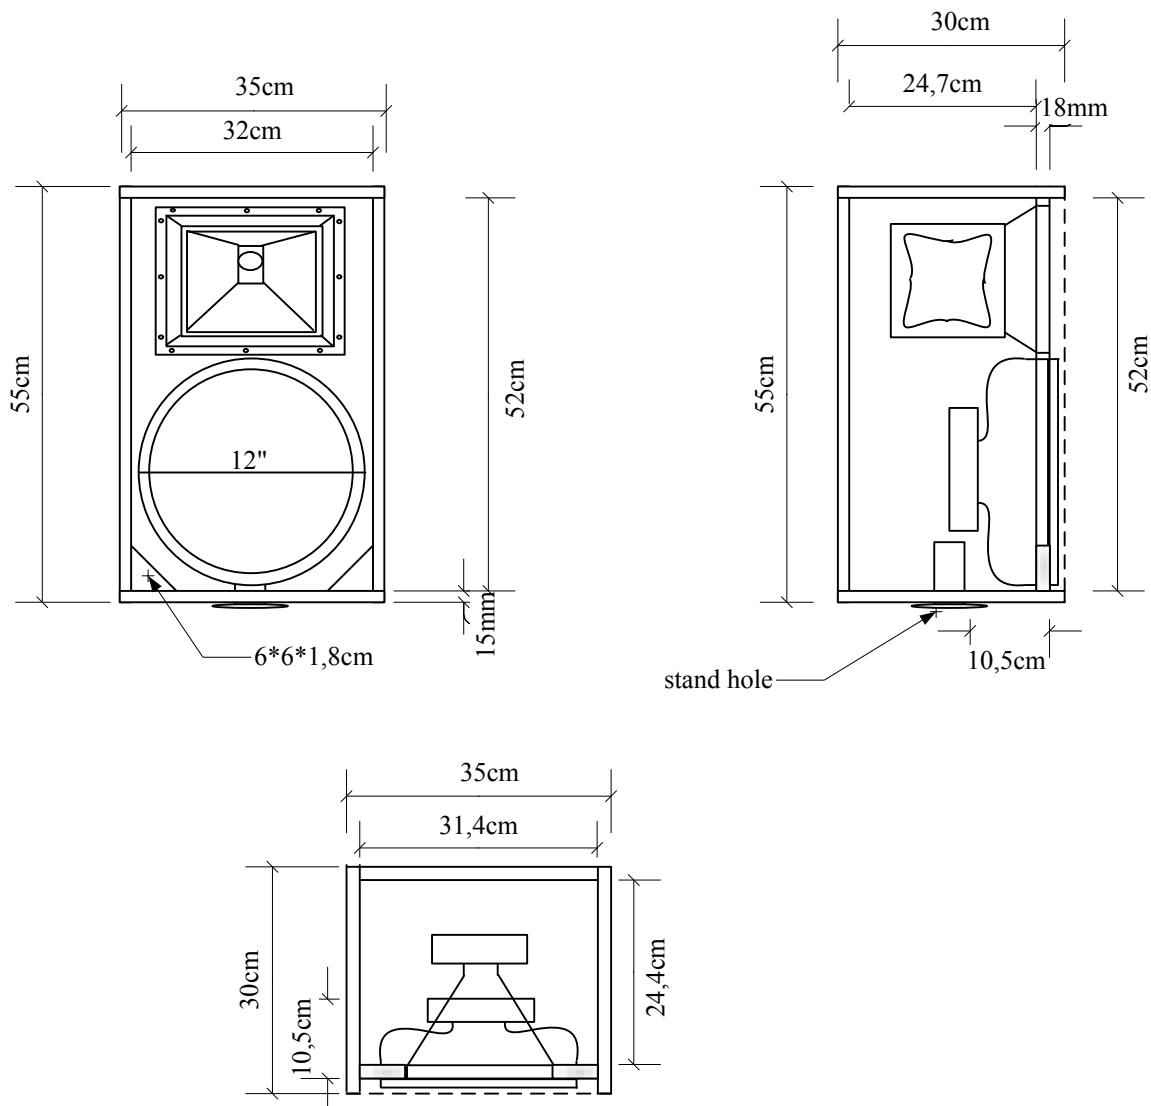

Model	Enclosure Design	Frequency Response	Efficiency	Power / imp.
topje 101	Fullrange vented	165~ 18KHz -3dB	98,5dB 1W/1M	500W RMS/8ohm
Components	Kast: Fins multiplex 15mm			Netto inhoud: 41Ltr
	Bass/mid: Eminence kappa 12A 60Hz-5KHz/450W/8ohm		passief filter 1,8KHz 12/18dB/okt/8ohm	
	Driver: Eminence psd2002 80w/8ohm/1,5-20Khz + SST1 90*40hoorn			
	Highpass 180Hz 4de order EQ 180Hz/Q=2/G=+1,5dB 1200Hz/Q=1/G=+3dB			
Ontwerp: van den Hoogen's Servicebedrijf / Boi van den Hoogen / www.boyzpc.nl / 07-10-2004				